

Xiamen Rizheng Industry Co.,Ltd

Super Disc Touch Pen Kits Assembly Instructions


Required Accessories

- 7mm pen mandrel
- 3 piece Bushing Set RZ-BPTS316#-BU
- Drill Bit 7mm RZ-DB007
- Barrel Trimmer use 7mm Shaft RZ-PM011
- Live Tailstock Center
- Glue (Thick CA or Epoxy)
- Pen Blank: Minimum Size- 5/8" x 4"




Preparing the Blank

- Cut 2 blanks to the length of the tube(s) and add 1/16" for squaring off.
- Drill 7mm holes lengthwise through the blanks.
- Spread glue over the tube(s), insert the blank with a twisting motion to spread the glue evenly inside.
- Center the tubes lengthwise inside the blanks.
- When the glue is dry, square the ends of the blanks. Use a 7mm barrel trimmer, or a universal pen blank squaring jig with a power disc sander. Take the excess material down flush with the ends of the brass tube. (do not trim beyond the length of the tube since this may interfere with operation of the mechanism and assembly). Use a barrel trimmer to clean the inside of the tube.

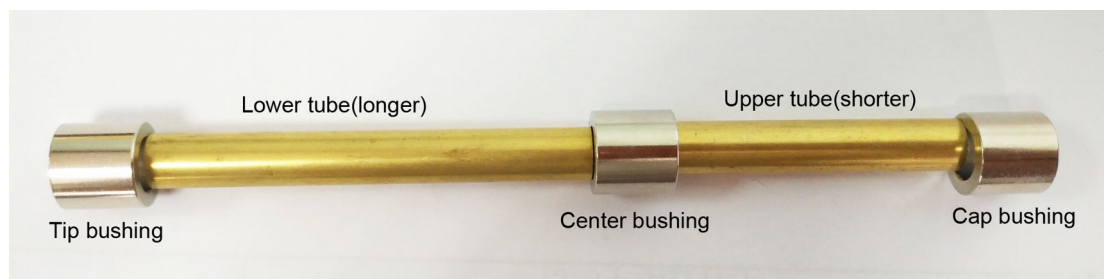

Turning the Blank

- Mount the bushings and blanks according the diagram above.
- Thread on the knurled nut and hand tighten to hold all components in place.
- Slide the tailstock up snugly against the mandrel shaft inserting the live center point into the mandrel dimple, lock in place.
- Hand tighten the quill adjustment to firm up the mandrel. (DO NOT overtighten, it could damage the mandrel.
- Using sharp tools, turn the blank down close to the bushing diameter. Turn the barrel (straight or to a profile of your choice)
- Sand the blank down to be flush with the bushings gradually increasing the sandpaper grits.
- Finish the barrel with your choice of polish. Allow sufficient time for the polish to cure.

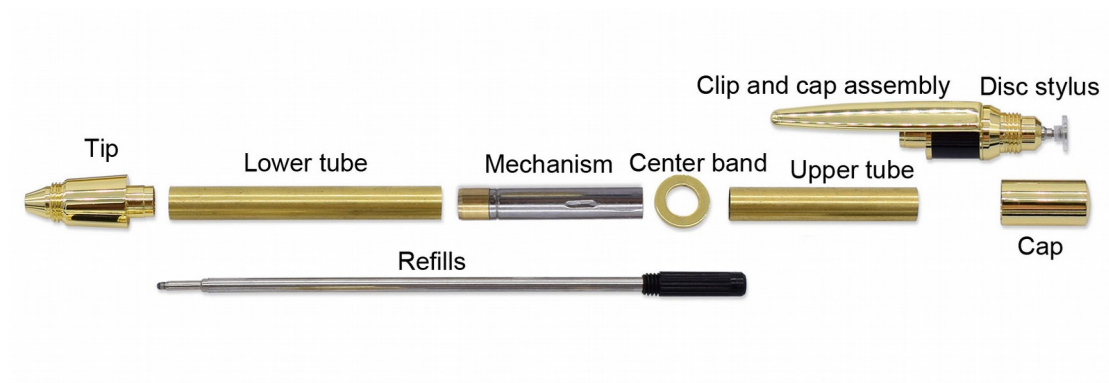

Assembly

- Layout parts according to diagram above
- Press the tip into either end of the lower (Longer) barrel.
- Press the mechanism into the opposite end of the barrel. Press until only 1" of chrome is showing.
- Affix the center band over the mechanism, slide pass the ribs. (Press using the upper barrel if too tight).
- Insert the refill into the opening at the mechanism, screw into bottom.
- Press the cap and clip assembly into either end of the upper barrel.
- Engage both ends of the pen to close the gap.
- The pen is ready to use by twisting the ends to advance or retract the refill.
- To change the refill, pull off the cap section to expose refill.